



T-52A CAVITY DETAILS

(ALL DIMENSIONS ARE IN MILLIMETERS)
Δ1.000-14 UNS-2B THREAD
24,22/24,41 PITCH DIA.

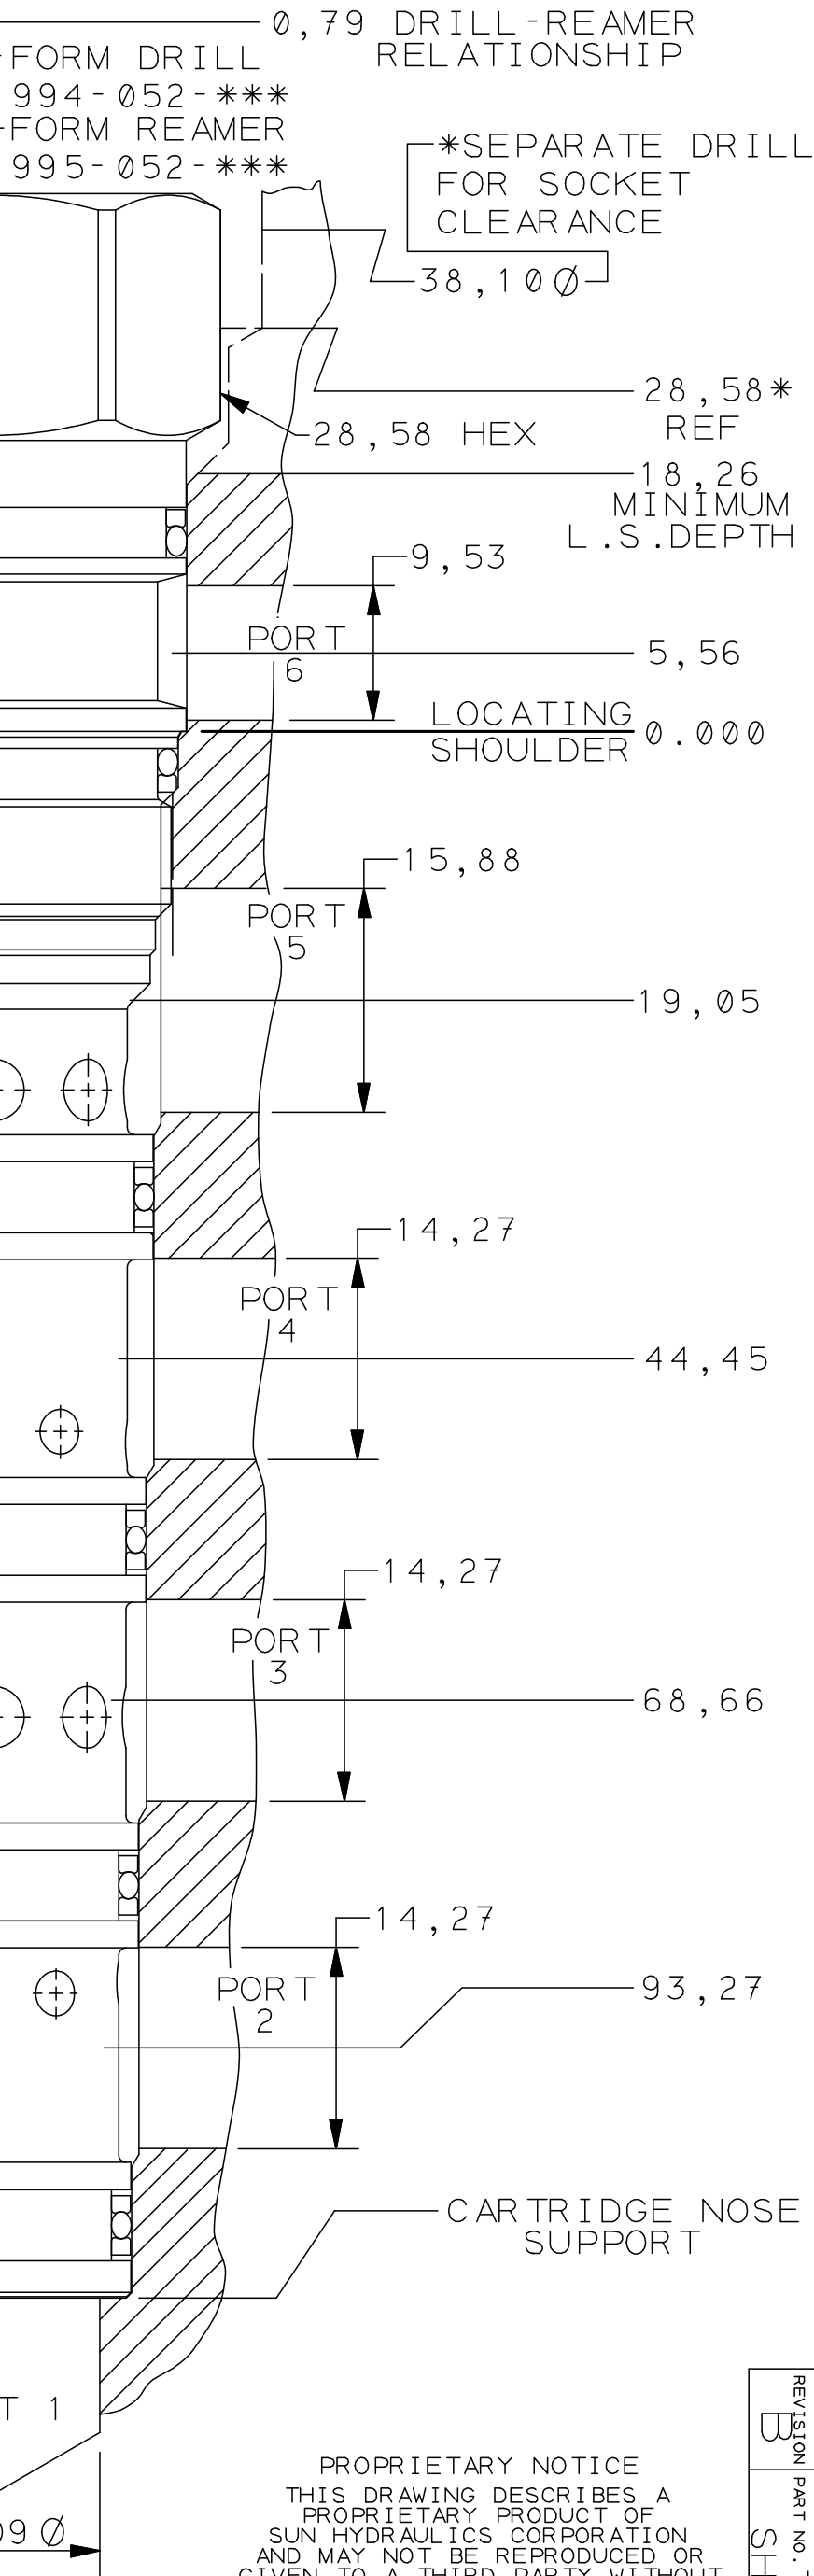

				UNLESS OTHERWISE SPECIFIED				TITLE T-52A CAVITY DIMENSIONS, TOOLING, PORTING				REVISION B		PART NO. T-52A METRIC SHEET 2 OF 3	

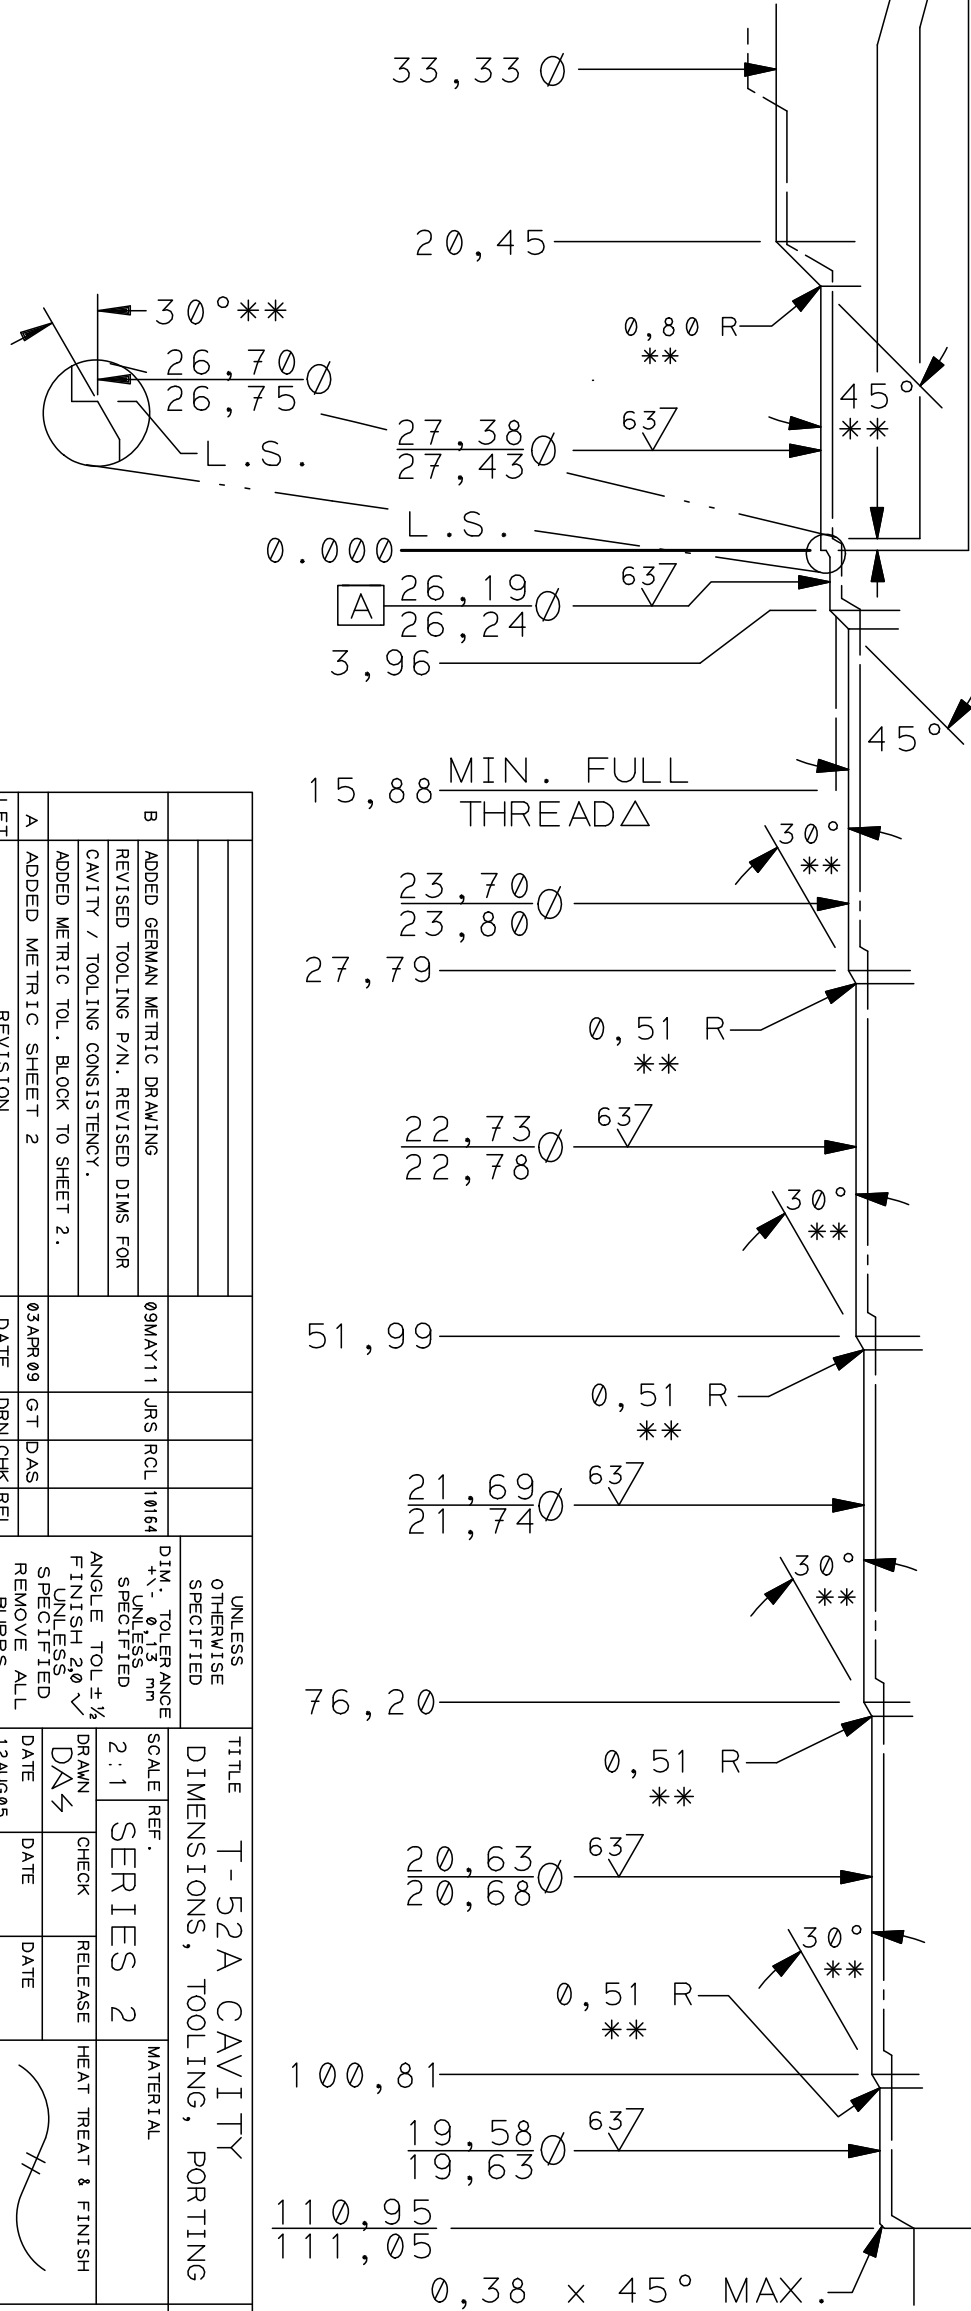

0.05 A THREAD AND ALL DIAMETERS
* SOCKET WRENCH CLEARANCE DIAMETER. RECOMMENDED MAXIMUM L.S. DEPTH WITHOUT SOCKET CLEARANCE: 43,66
MINIMUM CENTERLINE-TO-EDGE DISTANCE: 19,46
MINIMUM CENTERLINE-TO-CENTERLINE DISTANCE: 34,93
NBOM CALLOUT: SUN STD T-52A CAVITY
NBOM CODE: T52A
** ALL O-RING "LEAD IN'S" TO BE SMOOTH AND FREE OF NICKS AND SHARP EDGES.

PROPRIETARY NOTICE
THIS DRAWING DESCRIBES A PROPRIETARY PRODUCT OF SUN HYDRAULICS CORPORATION AND MAY NOT BE REPRODUCED OR GIVEN TO A THIRD PARTY WITHOUT WRITTEN PERMISSION FROM SUN HYDRAULICS CORPORATION
© SUN HYDRAULICS CORP.

REVISION B PART No. T-52A METRIC SHEET 2 OF 3