


# Air Breathers

ABF-3/10  
 ABF-3/10-M-P12  
 ABF-S40  
 ABF-S40-M-P12  
 MBF-3-M-P20  
 MBF-10-M-P20



## Breathers with NPT Adapters

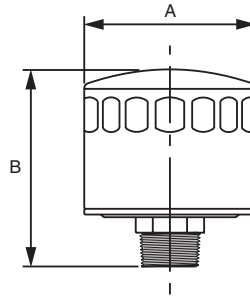

## Air Breathers

Filler Strainer Assemblies

Magnetic Suction Separators

Suction Strainers


### Specifications: Breathers with NPT Adapters

Model Number	A	B	Adapter Type	Minimal Micron Retention	Normal Capacity	Air Flow/psi Drop
ABF-3/10	3.69 (94)	4.28 (109)	.75" NPT Nylon	10	40 SCFM	0.4 psi at 20 SCFM- 1.25 psi at 40 SCFM
ABF-3/10-M-P12			.75" NPT Steel	10		
ABF-S40	3.69 (94)	4.28 (109)	.75" NPT Nylon	40	40 SCFM	0.29 psi at 20 SCFM- 1.06 psi at 40 SCFM
ABF-S40-M-P12			.75" NPT Steel	40		
MBF-3-M-P20	5.06 (128)	8.31 (211)	1.25" NPT Steel	3	200 SCFM	0.3 psi at 70 SCFM- 1.25 psi at 200 SCFM
MBF-10-M-P20				10		

SCFM = Standard Cubic Feet per Minute

### ABF-3/10-F, ABF-S40-F

These breathers are designed for retrofit on hydraulic reservoirs using the SAE-type flange fill port assembly.

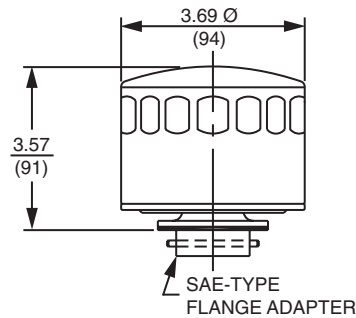

## Breathers with Flange Adapters



### ABF-3/10FA, B, C, ABF-S40FA, B, C Breathers with Dipstick

The air breathers above are also available with a dipstick up to 24 inches in length. The dimensions to the "add line" and the "fill line" must be specified in the model number ABF-3/10-F, A, B, C, where:

A = overall length of the dipstick in inches

B = length from tip of dipstick to fill line in inches

C = length from tip of dipstick to add line in inches

For safety reasons, the tip of the dipstick is rounded. No tools are needed for installation and removal. A quarter turn should snugly seal the breather in place.

Minimum order quantity is 12.

